


RI40 玻璃釉高压色环电阻器 Glass-glazed Film High-voltage Resistor	文件编号 Document No.	YF-SE-02-09A/A01
	文件日期 Released Date	2021-12-16
	页次 Page:	1/4

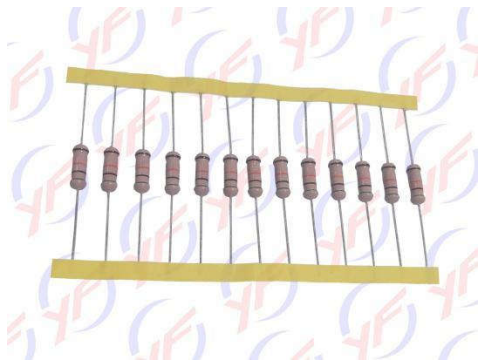

■产品特性 Feature:

- 低功率、体积小、阻值范围广
Low power, small size, wide resistance range;
- 性能稳定、高频特性好、抗高压脉冲性
Stable performance of high voltage, high voltage pulsing;
- 符合环保要求 RoHS compliant, halogen free, lead free;
- 防护等级 INGRESS PROTECTION: IP50;

■产品引用范围 Application:

- 电源系统/充电设备 Power supply;
- 新能源控制系统 New energy control system;
- 家电/音响系统 Entertainment system;
- 工业/自动化行业 Industrial/automation system;

■产品订货方式 Parts Number Explanation:

RI40	-	1W	-	510K	-	J	-	TB
类型 Product Type		功率 Rated Power		阻值 Resistance		误差 Tolerance		包装 Packing
		1/4W		15K=15KΩ		F:±1%		TB: Belt type
		1/2W		120K=120KΩ		G:±2%		P: Bulk type
		1W		3M3=3.3MΩ		J:±5%		F: Vertical form
		2W		20M=20MΩ		K:±10%		M: Horizontal form
		3W		...		M:±20%		FK: Vertical with pink
		5W						MK: Horizontal/Pink

■环保申明 RoHS declaration:

本产品符合 RoHS 2.0(2011/65/EU)环保要求。

The products meet the standards of RoHS 2.0(2011/65/EU).

■参考标准 Reliability standard

可焊性 Weldability Standard:	IEC60068-2-20
环境标准 Environment Standard:	SJ/T 11363-2006, ROHS 2011/65/EU
检验标准 QC standard:	MIL-STD-105E, GB/T 2828.1-2003
产品性能 Performance:	IEC60115-2008, GB/T5729-2003

RI40 玻璃釉高压色环电阻器 Glass-glazed Film High-voltage Resistor	文件编号 Document No.	YF-SE-02-09A/A01
	文件日期 Released Date	2021-12-16
	页次 Page:	2/4

■标准产品规格 Standard electrical parameters:

功率 Rated Power At 70℃	最高使用电压 Max. Rating Voltage(U _R)	最高超载电压 Max. Overload Voltage(U _L)	绝缘电压 Insulation Voltage(U _N)	温度系数 T.C.R.	工作温度 Operating Temperature
1/4W	1500V	2500V	500	T50: ±50PPM/℃ T100: ±100PPM/℃ T200: ±200PPM/℃ T350: ±350PPM/℃ T500: ±500PPM/℃	-55℃ ~ +155℃
1/2W	2500V	3500V	600		
1W	3500V	5000V	800		
2W	5000V	7000V	800		
3W	6000V	8000V	800		
5W	10KV	15KV	800		


●额定电压 Rating Voltage:

额定功率对应的额定电压,直流(DC)或交流电流(AC),可以采用如下公式计算。当计算的额定电压超过最高使用电压时, 则使用最高使用电压为额定电压。

The following equation may be used to determine the DC(Direct Current) or AC(Alternating Current)(RMS, root mean square value) of normal rated power. However, if the result value exceeds the max. using voltage, the max. using voltage is to be used:


$U_P = \sqrt{P \times R}$	U _P : 额定电压 Rating voltage (V)
	P: 额定功率 Rating Power (W)
	R: 电阻值 Resistance(Ω)

●脉冲电压 Anti-pulse voltage

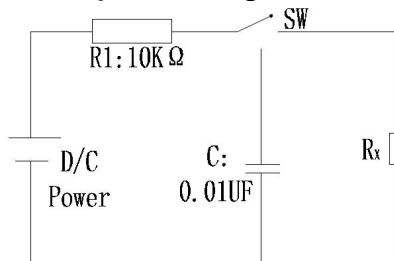

功率	R _x 阻值范围 Ω	冲击电压
1/4W	100K < R	3KV
1/2W	10K ≤ R < 100K	3KV
1/2W	100K ≤ R < 480K	5KV
1/2W	480K ≤ R	10KV
> 1/2W	480K ≤ R	10KV

■产品尺寸 Type dimension:

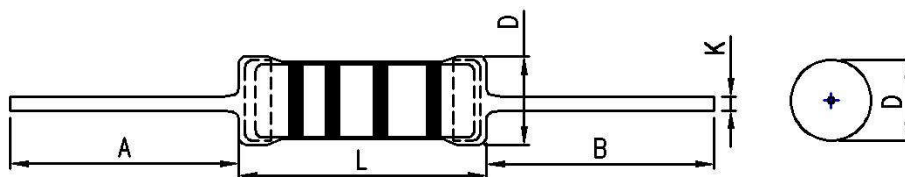

额定功率 Rating Power	阻值 Resistance	尺寸 Dimension(mm)				备注 Remarks
		L±1.0	D±0.5	K±0.1	A/B±2.0	
1/4W	1K~1000MΩ	6.8	2.4	0.5	26	-
1/2W	1K~1000MΩ	9.8	3.5	0.55	25	
1WS	10K~1000MΩ	11.0	4.0	0.65	24	φ 3*9
1W	10K~1000MΩ	11.5	4.5	0.65	24	φ 3.5*10
1WL	10K~1000MΩ	12.5	4.5	0.65	24	φ 3*11
2W	10K~1000MΩ	15.5	5.0	0.75	27	φ 4*14
2WL	10K~1000MΩ	15.5	5.6	0.75	27	φ 4.5*14
3W	10K~1000MΩ	17.5	6.2	0.75	26	
5W	10K~1000MΩ	24.5	8.0	0.75	33	


RI40 玻璃釉高压色环电阻器 Glass-glazed Film High-voltage Resistor	文件编号 Document No.	YF-SE-02-09A/A01
	文件日期 Released Date	2021-12-16
	页次 Page:	3/4

■产品特性 Product performance:

●额定功耗 Power Derating Curve:

额定功率是周围温度 70℃ 以下(推荐工作区域),可连续使用的负载功率的最大数值,且应使机械性能与电气性能满足. 如周围温度超过 70℃ 时,依照下图功率衰减曲线而定。

Rated power is the max using power under 70℃ and continuous duty. At the same time, the overload power is fit for mechanical properties and electrical properties. When the temperature is over 70℃,the power must be derated in accordance with the curve as below:

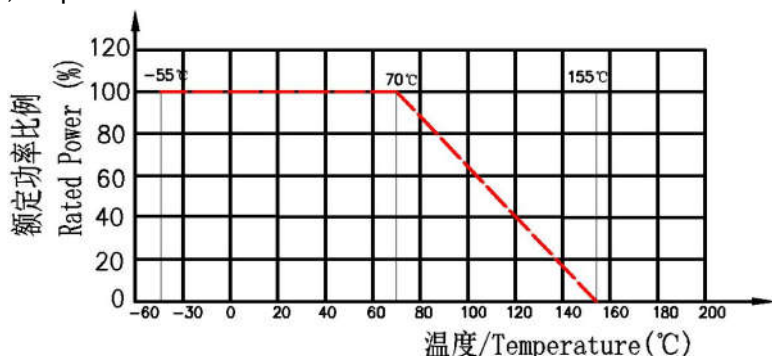


●产品可靠性特性 Product reliable performance

测试项目 Test Item	测试方法 Test Method	测试方法 Procedure	测试标准 Requirements										
端子强度 Terminal Strength	IEC60115-1 4.33	端子加载 20N 拉力, 时间 10 秒; Pressurizing force:20N, 10 seconds	无损坏 No damage										
本体强度 Body strength	IEC60115-1 4.15	电阻体中间, 加载 10N 的压力, 时间 10 秒 Central part pressurizing force:10N, 10seconds	无损坏 No damage										
耐振性 Vibration	IEC60115-1 4.22	10~55HZ/0.75mm/2H*3											
耐焊锡热 Soldering Heat	IEC60115-1 4.18	350±5℃, 10S	△R/R≤±0.5%										
可焊锡性 Solderability	IEC60115-1 4.17	245±5℃, 2±0.5S	≥95%										
温度系数 T.C.R.	IEC60115-1 4.8	$T.C.R. = \frac{R - R_0}{R_0} \times \frac{1}{T - T_0} \times 10^6 \quad (PPM/^\circ C)$ R ₀ :常温下(T ₀)的阻值 Resistance at the room temperature(T ₀); R: 测试温度(T=T ₀ +100)的阻值 Resistance at T=T ₀ +100;	根据产品额定参数 Refer to Ratings										
短时间过负载 Short Time Overload	IEC60115-1 4.13	Min(2.5×√P×R, U _R), 5s	△R/R≤±2.0%										
绝缘耐压 Withstanding voltage	IEC60115-1 4.7	U _N , 60S, I≤2mA.	△R/R≤±0.5%										
绝缘阻值 Insulation resistance	IEC60115-1 4.6	DC500V, R>100MΩ	△R/R≤±0.5%										
高温存储 Temperature Exposure	IEC60115-1 4.23	125℃, 80%, 500H	无损伤 No damage										
温度循环 Temperature Cycle	IEC60115-1 4.19	如下循环 Cycle Below: <table><tr><td>温度 Temperature</td><td>25℃</td><td>150℃</td><td>25℃</td><td>-55℃</td></tr><tr><td>时间 Duration</td><td>15min</td><td>15min</td><td>15min</td><td>15min</td></tr></table> 持续时间 Cycle Time:1000Hrs.	温度 Temperature	25℃	150℃	25℃	-55℃	时间 Duration	15min	15min	15min	15min	无损坏 No damage △R/R≤±0.5%
温度 Temperature	25℃	150℃	25℃	-55℃									
时间 Duration	15min	15min	15min	15min									

RI40 玻璃釉高压色环电阻器 Glass-glazed Film High-voltage Resistor	文件编号 Document No.	YF-SE-02-09A/A01
	文件日期 Released Date	2021-12-16
	页次 Page:	4/4

■ 包装尺寸 Embossed Dimensions(TB):

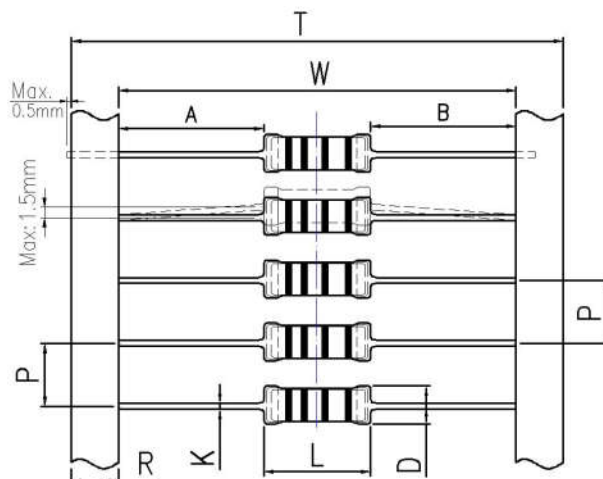

- (1) 位于胶带内导线长度.Total length within the belts.
- (2) 突出于胶带外线导线 The tail length outside the belts.
- (3) 涂装于导线长度 Painted length on the tail.
- (4) A 胶带与 B 胶带位置之差异 Location difference between A belt and B belt.
- (5) 电阻中心点位置之误差 Tolerance value of resistor body center.
- (6) 两端导线长度差不超过 1.5mm. Difference between A and B is less than 1.5mm.
- (7) 两个电阻体之间的距离. Distance of two resistor.
- (8) 每 50/100 个电阻于胶带打孔做记号 Make marks by every 50/100pcs.

额定功率 Power	最小包装 MPQ	带状尺寸 Lead taping Dimensions (mm)						
		L±1.0	D±0.5	d±0.05	P±1.0	W±2	T±2	(A/B)±2
1/4W	4,000	6.8	2.4	0.5	5	52	64	23
1/2W	2,000	9.8	3.5	0.55	5	52	64	21
1W	1,000	11.5	4.5	0.65	5	52	64	20
2W	1,000	15.5	5.0	0.75	10	62	74	23
3W	500	17.5	6.2	0.75	10	62	74	22
5W	250	24.5	8.0	0.75	10	82	93	28